



KD 200-60 P Series

KD240GX-LPB KD245GX-LPB

CUTTING EDGE TECHNOLOGY


As a pioneer with over 35 years in the solar energy industry, Kyocera demonstrates leadership in the development of solar energy products. Kyocera's *Kaizen* Philosophy, commitment to continuous improvement, is shown by repeatedly achieving world record cell efficiencies.

QUALITY BUILT IN

- UV stabilized, aesthetically pleasing black anodized frame
- Supported by major mounting structure manufacturers
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology with 12 AWG PV wire to work with transformerless inverters
- Quality locking MC4 plug-in connectors to provide safe and quick connections

RELIABLE

- Proven superior field performance
- Tight power tolerance
- Only module manufacturer to pass rigorous long-term testing performed by TÜV Rheinland

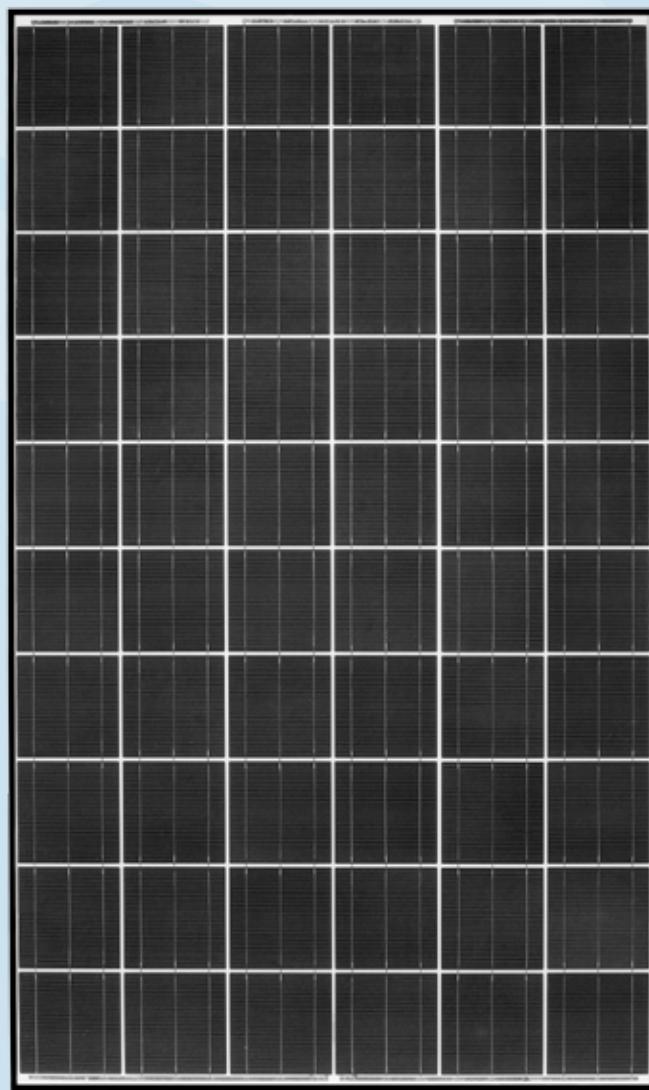

QUALIFICATIONS AND CERTIFICATIONS

UL Listing
QIGU.E173074



Registered to ISO9001-2000

NEC 2008 Compliant, UL 1703, ISO 9001, and ISO 14001
UL1703 Certified and Registered, UL Fire Safety Class C, CEC, FSEC
Certified IEC61215 Ed 2 IEC61730 by JET



QUALIFIED FOR "BUY AMERICAN"
Manufactured in San Diego, California

- Available Upon Request •



ELECTRICAL SPECIFICATIONS

Standard Test Conditions (STC) <i>STC = 1000 W/M² irradiance, 25°C module temperature, AM 1.5 spectrum*</i>			
	KD240GX-LPB	KD245GX-LPB	
P _{mp}	240	245	W
V _{mp}	29.8	29.8	V
I _{mp}	8.06	8.23	A
V _{oc}	36.9	36.9	V
I _{sc}	8.59	8.91	A
P _{tolerance}	+5/-3	+5/-3	%

Nominal Operating Cell Temperature Conditions (NOCT) <i>NOCT = 800 W/M² irradiance, 20°C ambient temperature, AM 1.5 spectrum*</i>			
T _{NOCT}	45	45	°C
P _{max}	172	176	W
V _{mp}	26.7	26.8	V
I _{mp}	6.45	6.58	A
V _{oc}	33.7	33.7	V
I _{sc}	6.95	7.21	A
PTC	217.3	219.1	W

Temperature Coefficients

P _{max}	-0.46	-0.46	%/°C
V _{mp}	-0.52	-0.52	%/°C
I _{mp}	0.0064	0.0065	%/°C
V _{oc}	-0.36	-0.36	%/°C
I _{sc}	0.060	0.060	%/°C
Operating Temp	-40 to +90	-40 to +90	°C

System Design

Series Fuse Rating	15 A
Maximum DC System Voltage (UL)	600 V
Hailstone Impact	1in (25mm) @ 51mph (23m/s)

* Subject to simulator measurement uncertainty of +/- 3%. KYOCERA reserves the right to modify these specifications without notice.

NEC 2008 COMPLIANT
UL 1703 LISTED
CERTIFIED IEC61215 ED2 IEC61730 BY JET




WARNING: Read the instruction manual in its entirety prior to handling, installing & operating Kyocera Solar modules.

MODULE CHARACTERISTICS

Dimensions: length/width/height	65.43in/38.98in/1.8in (1662mm/990mm/46mm)
Weight:	46.3lbs (21.0kg)

PACKAGING SPECIFICATIONS

Modules per pallet:	20
Pallets per 53' container:	36
Pallet box dimensions: length/width/height	66.54in/39.76in/47.24in (1690mm/1010mm/1200mm)
Pallet box weight:	1050 lbs (480kg)

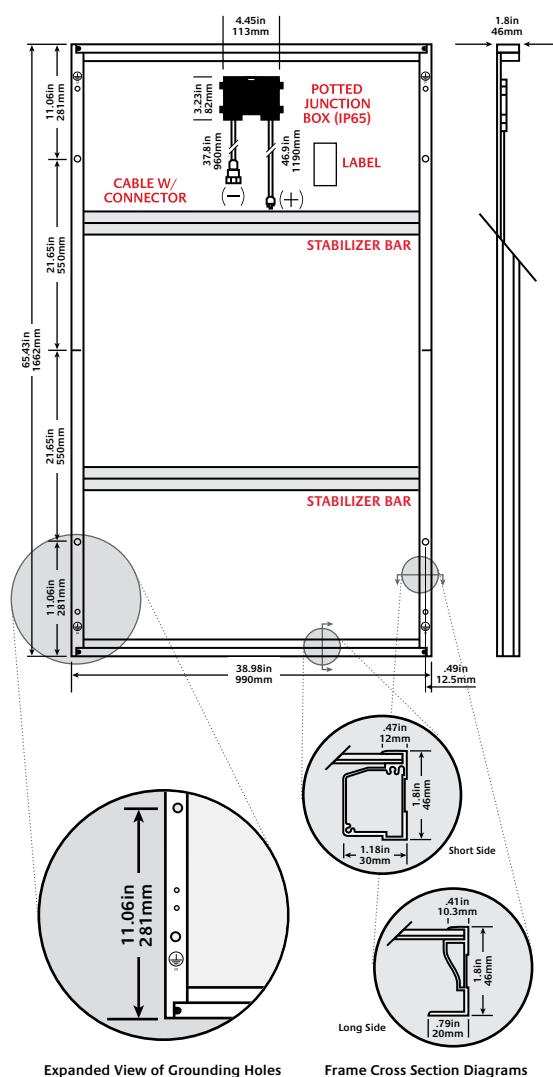

Expanded View of Grounding Holes

Frame Cross Section Diagrams

Legend

- MOUNTING HOLES .35in (9mm)
- DRAINAGE HOLES
- ⊕ GROUND SYMBOL .35in (9mm)